

High Current, Power Inductors

FAU0420-XXXMT Power Choke



Description

- AEC-Q200 qualified
- Halogen Free
- 155°C maximum total temperature operation
- 4.75 x 4.45 x 2.0mm maximum surface mount package
- Powder iron core material
- Magnetically shielded, low EMI
- High current carrying capacity, Low core losses
- RoHS compliant

Body electronics

- Central body control module
- Vehicle access control system
- Headlamps, tail lamps and interior lighting
- Heating ventilation and air conditioning controllers(HVAC)
- Doors, window lift and seat control
- Chassis and safety electronics
- Airbag control unit
- Electronic stability control system (ESC)
- Driver assistance systems
- Adaptive cruise control (ACC)
- Automatic parking control
- Collision avoidance system
- Car black box system

Applications

Engine and Powertrain Systems

- Electric pumps, motor control and auxiliaries
- Powertrain control module (PCU)
- Engine Control unit (ECU)
- Transmission Control Unit (TCU)

Environmental Data

- Storage temperature range: -55°C to +155 °C
- Operating temperature range: -55°C to +155°C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant

Description						
Model		Inductance Value	Inductance Tolerance			
Global Part Number						
F	A	U	0	4	2	0
Automotive Series		Dimensions		Inductance Value		Tol.
M		T		Tape carrier Package		


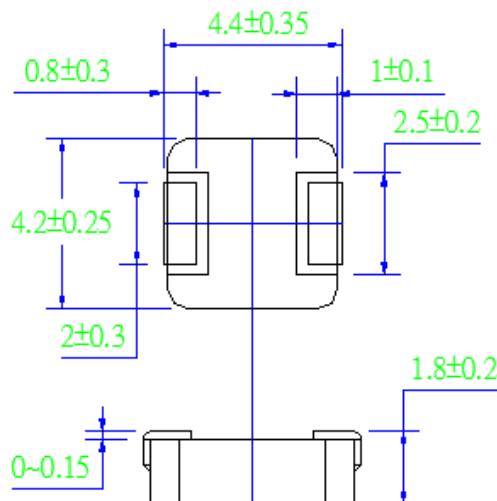
深圳长江微电科技有限公司

NO.: CJ-AUTO-03-01-363 (A2)

Part No.	Inductance	DC Resistance		Heating Rating Current	Saturation Current
	L0 (μ H)	DCR (m Ω)		I _{dc} (A)	I _{sat} (A)
	$\pm 20\%$, 100 kHz, 1V	TYP.	MAX.	TYP.	TYP.
FAU0420-R10MT	0.1	3.1	3.6	15.0	22.0
FAU0420-R22MT	0.22	5.5	6.3	12.0	17.0
FAU0420-R33MT	0.33	7.5	8.6	10.0	12.0
FAU0420-R47MT	0.47	10.5	12.0	8.5	11.0
FAU0420-R56MT	0.56	12.0	14.0	8.0	10.0
FAU0420-R68MT	0.68	12.5	14.5	7.5	9.0
FAU0420-1R0MT	1.0	20.0	23.0	6.5	7.0
FAU0420-1R2MT	1.2	23.0	26.5	6.2	6.8
FAU0420-1R5MT	1.5	25.0	29.0	4.8	6.0
FAU0420-2R2MT	2.2	40.0	46.0	4.2	5.0
FAU0420-3R3MT	3.3	71.0	82.0	3.3	4.0
FAU0420-4R7MT	4.7	98.0	113.0	2.5	3.2
FAU0420-6R8MT	6.8	167.0	192.0	2.0	2.6
FAU0420-100MT	10.0	245.0	282.0	1.5	2.0

Notes

1. All test data is referenced to 25 °C ambient
2. Operating temperature range - 55 °C to + 155 °C
3. I_{dc}(A):DC current (A) that will cause an approximate ΔT of 40 °C(reference ambient temperature is 25°C)
4. I_{sat}(A):DC current (A) that will cause L₀ to drop approximately 30 %
5. The part temperature (ambient + temp rise) should not exceed 155 °C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

•Dimensions-mm


Recommend Land Pattern Dimensions

•Marking

The inductor is marked with a 3-digit code







Example - -1.0→1R0

Note : Using Laser for marking




深圳长江微电科技有限公司

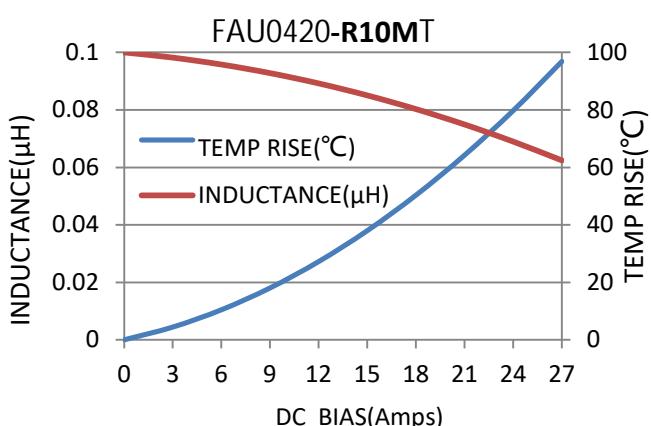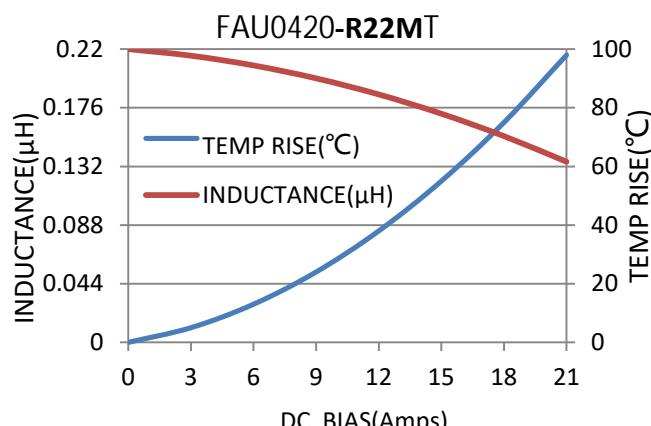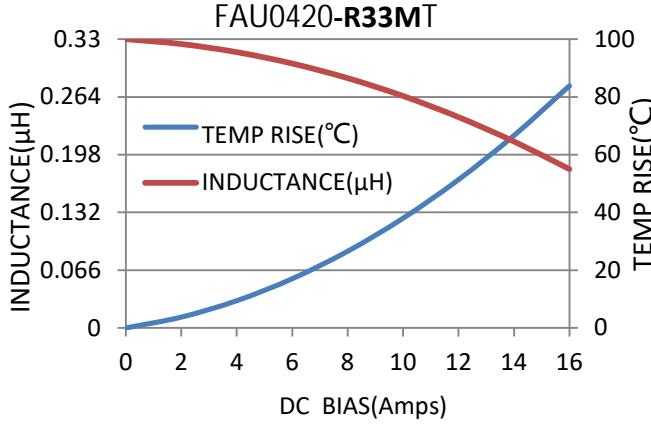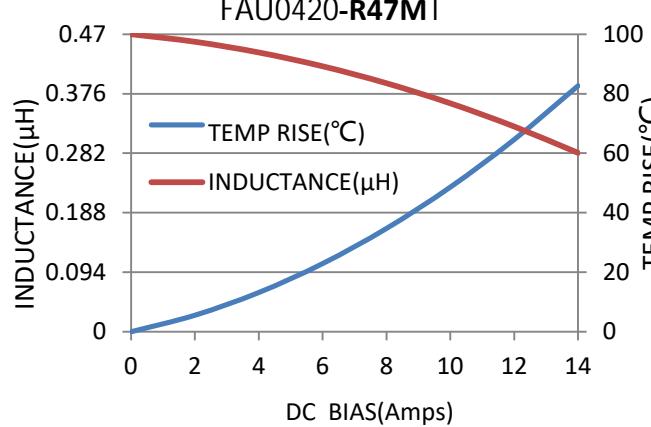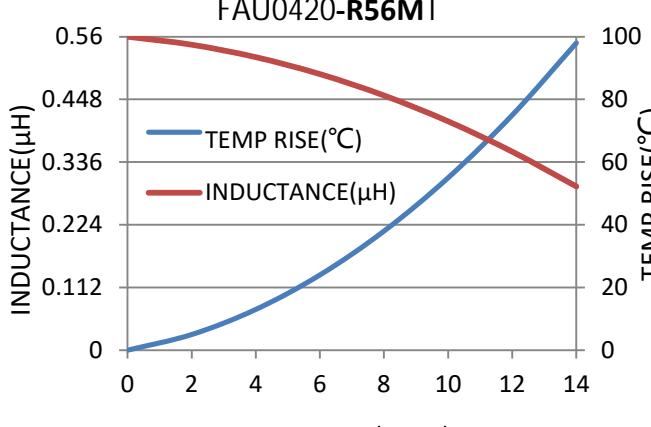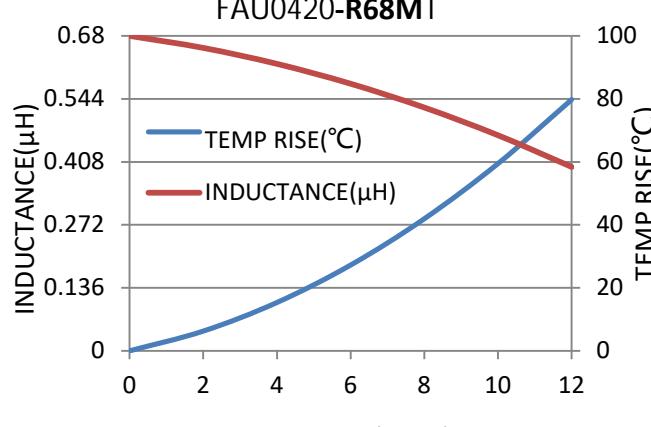NO.: CJ-AUTO-03-01-363 (A2)

Performance Graphs	
Test Instruments	Test Condition
Wayne kerr 3260B/G LCR Meter Wayne kerr 3265B Bias Current Source	Temperature: $26 \pm 3^\circ\text{C}$ Humidity: < 70% RH Frequency: 100 KHz, 1.0V
	
	
	

深圳长江微电科技有限公司

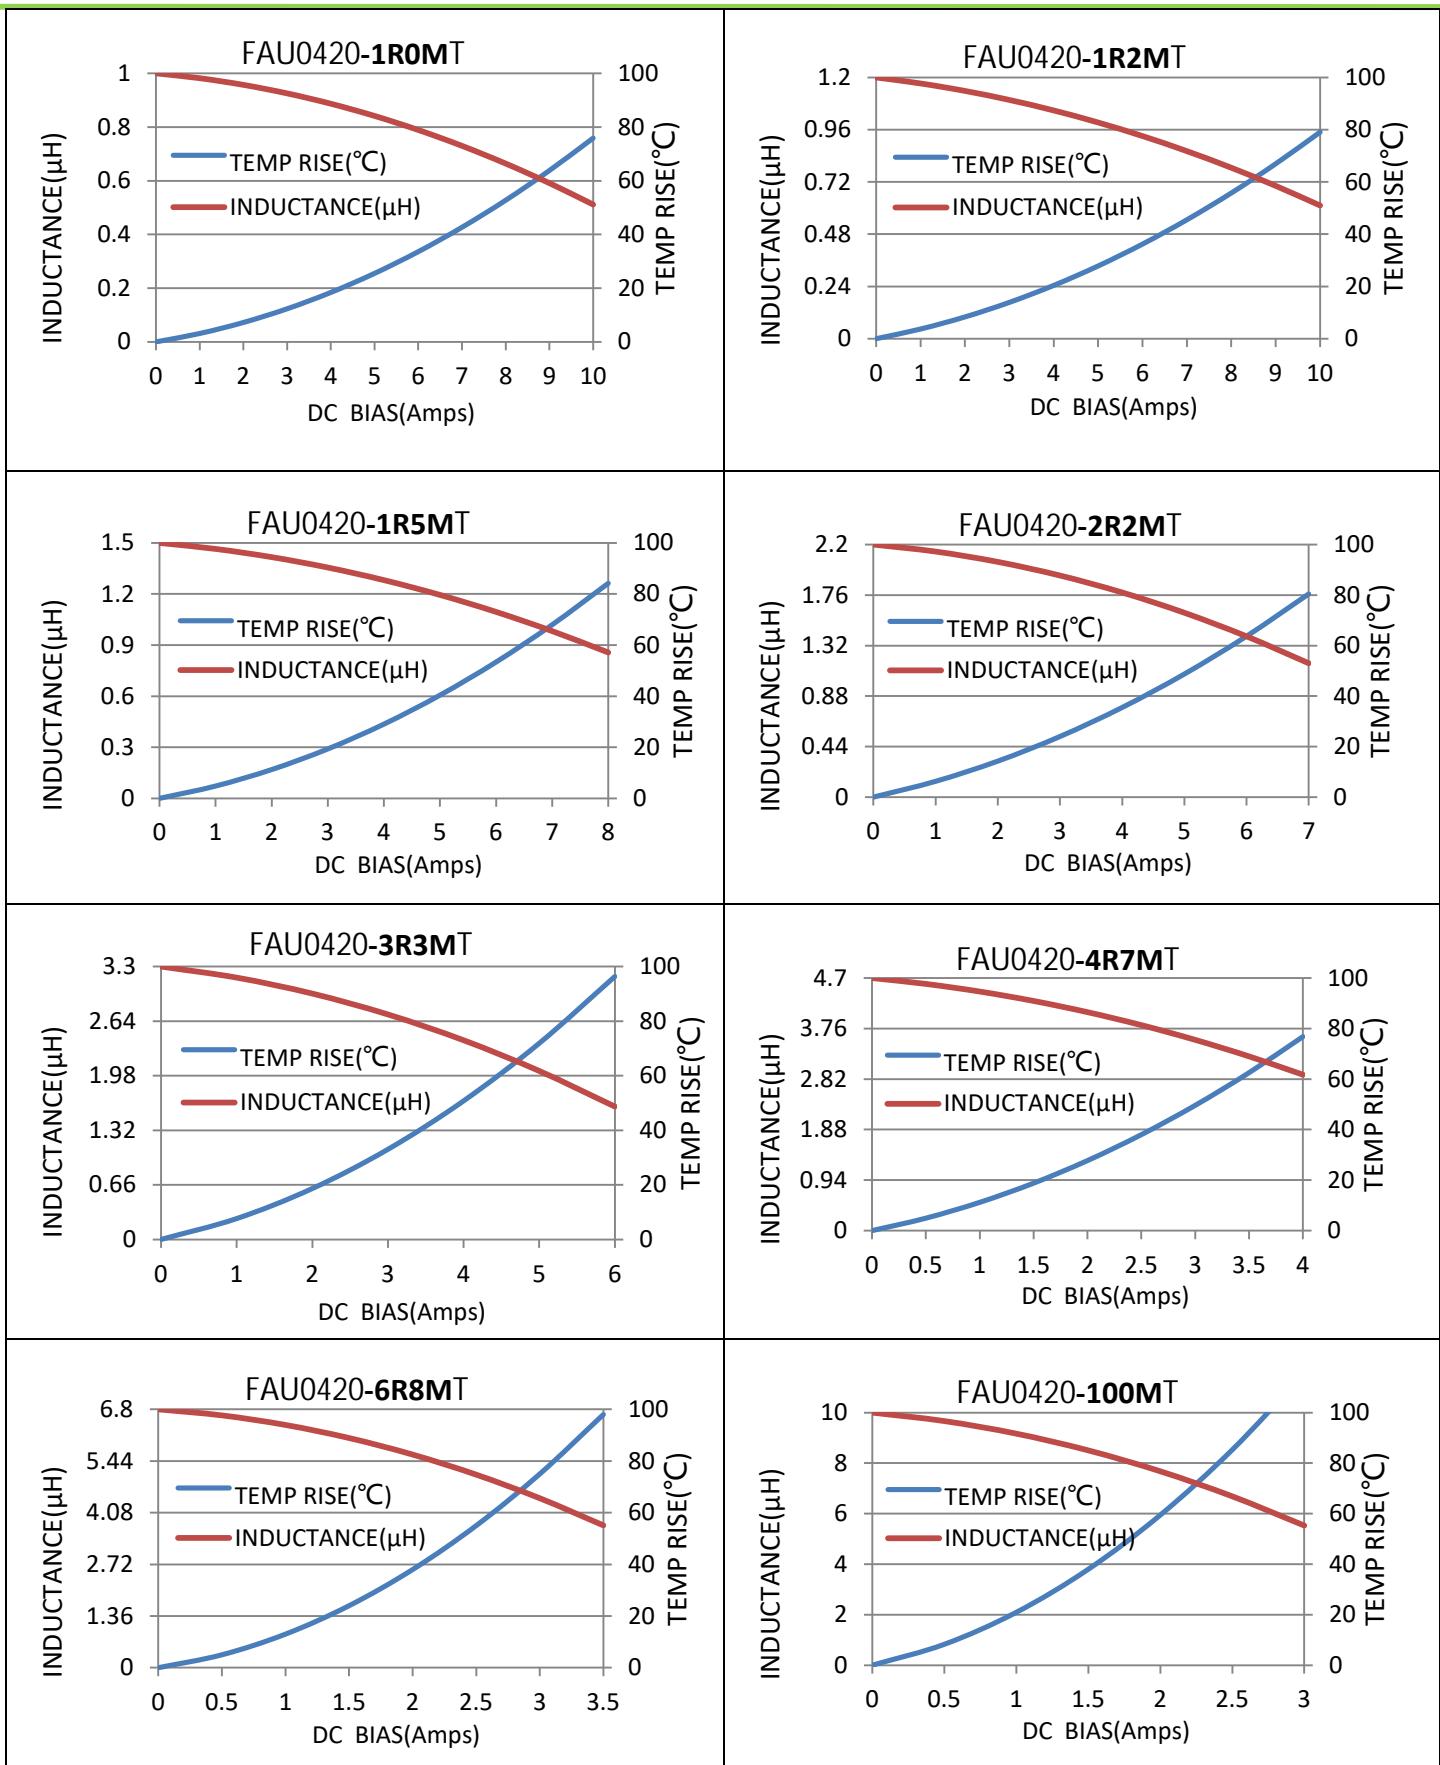NO.: CJ-AUTO-03-01-363 (A2)



深圳长江微电科技有限公司


NO.: CJ-AUTO-03-01-363 (A2)

Mechanical Reliability		
Item	Specification and Requirement	Test Method
Solderability	The surface of terminal immersed shall be minimum of 95% covered with a new coating of solder	<p>Solder heat proof:</p> <ol style="list-style-type: none"> Precondition: 8 hours steam aging Retention time: 255 ± 5 °C for 5 ± 0.5 seconds
Vibration	Inductance change: Within $\pm 10\%$ Without mechanical damage such as break	<ol style="list-style-type: none"> Vibration frequency:(10 Hz to 2000 Hz) Vibration time:Each four hours (12 times) in X, Y, Z direction: 12 hours in total Amplitude: 1mm or 10 G
Shock	Inductance change: Within $\pm 10\%$ Without mechanical damage such as break	<ol style="list-style-type: none"> Peak value: 100 G Duration of pulse: 6ms Waveform: Half-sine Shocks; 3 times in X, Y, Z direction, 9 times in total
Endurance Reliability		
Item	Specification and Requirement	Test Method
Thermal Shock	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	<ol style="list-style-type: none"> Repeat 1000 cycles as follow: (-55 ± 2 °C; 30 ± 3 min) $\rightarrow (+155 \pm 2$ °C, 30 ± 3 min) change over time of temperature: ≤ 10s Recovery: $24 + 4 / -0$ hours of recovery under the standard condition after the test.
High Temperature &Humidity	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	$85^{\circ}\text{C} 85\% \text{RH}$, Duration: $240+4/-0$ hours
Operational Life	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	<ol style="list-style-type: none"> Rated current (Idc) Environment condition: 85 °C Duration: $1000 + 4 / -0$ hours
Low Temperature Store	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	Store temperature: -55 ± 2 °C, $1000 + 4 / -0$ hours
High Temperature Store	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	Store temperature: $+155 \pm 2$ °C, $1000 + 4 / -0$ hours

深圳长江微电科技有限公司


NO.: CJ-AUTO-03-01-363 (A2)

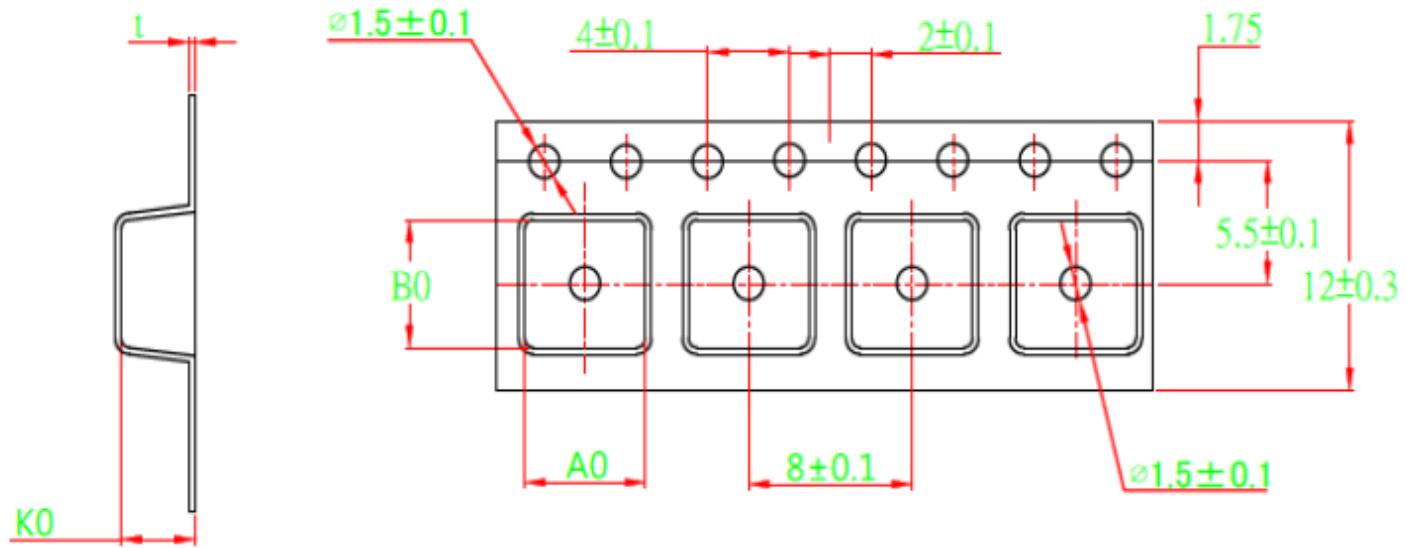Tape Packaging Dimensions



A0	B0	K0	t
4.5 ± 0.1	4.8 ± 0.1	2.5 ± 0.15	0.35 ± 0.05

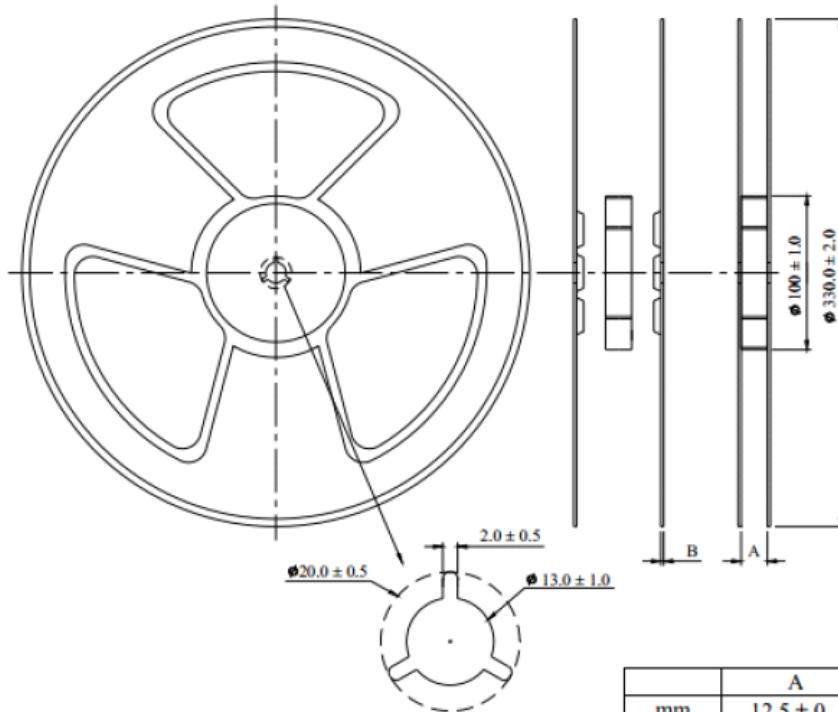Reel Dimensions




深圳长江微电科技有限公司

NO.: CJ-AUTO-03-01-363 (A2)

• Peel force of top cover tape

The peel speed shall be about 300mm/minute

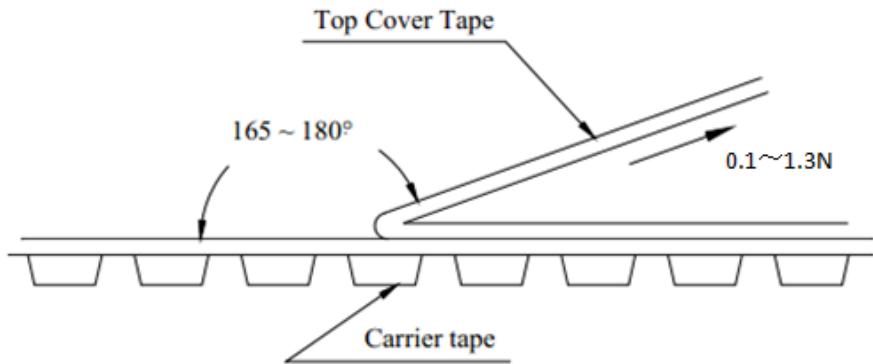The peel force of top cover tape shall be between 0.1 to 1.3N



• Numbers of taping

3000pieces/reel